



Stretch Wrapper
CTA 215




Stretch Wrapper CTA 215

The CTA 215 is an extremely robust rotary arm wrapping machine that can wrap irregular shaped loads. Operator starts wrap cycle at machine. Operator manually cuts/attaches film.

These properties guarantee not only good load securement but also minimum material costs, i.e. low film consumption. With the CTA 215 you have the possibility to regulate the application of tension (force of applying the film to the product).

Standard machine specification and dimensions

Machine	Rotary arm speed	Up to 10,5 rpm adjustable
	Film carriage speed	Variable speed
	Bottom/ top wraps	1–7 (Prog 3, 2-14)
	Start / stop	Frequency controlled, soft start / soft rundown
	Pre-stretch system	POWER ECOSTRETCH®
	Pre-stretch ratio	30, 60, 80, 110, 145, 200, 250 or 300 % adjustable
	Stretch wrapping programs	5 standard, 1 option
	Controller	PLC
Power	Supply	Single phase 240V 50 Hz
	Consumption	0,8 kW
	Protection	IP54
	Loading	10 A
Pallet goods	Max size (length x width)	1200 x 1200 mm
	Max. goods height incl. pallet:	2400 mm
	Permitted load weight	Unlimited (depends on floor type)
Stretch film	Core diameter	76 mm
	Outer diameter, max	250 mm
	Film width, max	500 mm
	Film thickness	9-35 my
Floor mounting	Min. concrete thickness	150 mm

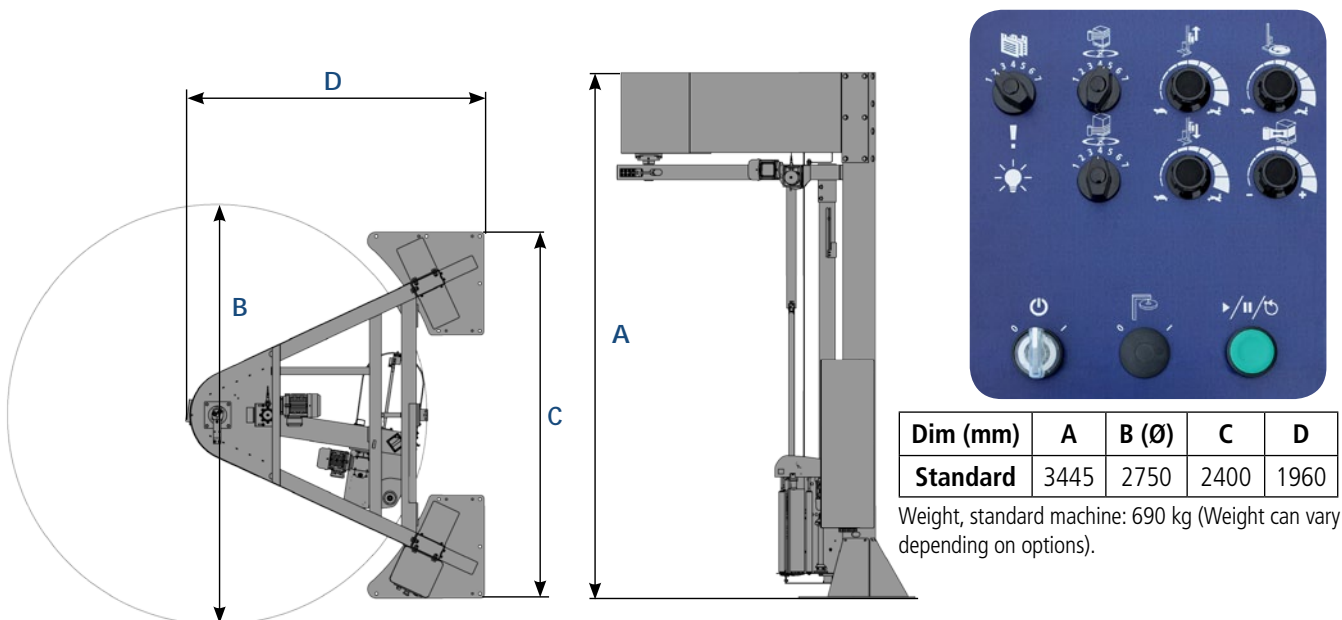

WWW.CYKLOPTEKNIK.SE